

ECOSOFT INOX MO4 8" REVERSE OSMOSIS SYSTEM

APPLICATIONS

Process water, rinse water, steam boilers, heating and cooling circuits, agriculture, desalination, food and beverage, utility water treatment.

EQUIPMENT:

- Grundfos® CR 10-12 high pressure pump..... 1 pcs
- 8040-2 membrane housing..... 2 pcs
- BB20 sediment prefilter..... 3 pcs
- Motorized valves..... 2 pcs
(feed water in, flush out)
- Balancing valves..... 2 pcs
(concentrate reject, concentrate recycle)
- Electrical panel with Ecosoft controller OC5000... 1 set
- Set of instruments..... 1 set
- **AISI 316 Stainless steel high pressure line**..... 1 set
- **AISI 304 Stainless steel frame**..... 1 set
- **Frame mounted casters**..... 1 set



Ecosoft reserves the right to amend the product's system architecture provided that its functionality and usability will not deteriorate

OPTIONS

- Filmtec™ XLE-440 / ECO PRO-440 or Ecosoft ELP-8040 membranes
- Dosing pump for antiscalant or other RO chemicals
- Permeate inlet for permeate membrane rinse
- Raw water mixing line

CONNECTION PORT SIZES:

Influent water.....	G 1½"
Permeate.....	G 1"
Concentrate.....	G 1½"
CIP inlet.....	G 1½"
CIP return.....	G 1½"
CIP permeate.....	G ½"
Antiscalant dosing port.....	G ½"

PHYSICAL PARAMETERS:

Approximate dimensions (bare).....	2.90 × 1.20 × 1.95 m (Width × Depth × Height, ±5%)
Approximate dimensions (crated).....	3.05 × 1.37 × 2.24 m (Width × Depth × Height, ±5%)
Approximate weight (bare).....	340 kg
Approximate weight (crated).....	500 kg

ECOSOFT INOX MO4 8" REVERSE OSMOSIS SYSTEM

Code	Product	Flow capacity, m³/h (GPH)	Membranes**
MO4TI5	Ecosoft INOX MO4 RO System	4–5 (1 060–1 320)	4/80 x 40

** Membranes are not included


TECHNICAL SPECIFICATION

Permeate capacity ¹	4 m ³ /h
Permeate recovery ²	75%
Maximum TDS	3000 mg/L
Influent flow demand	5.5...8 m ³ /h (service) 10 m ³ /h (rinse)
Operating pressure	8...12 bar
Maximum pressure	14 bar
Electrical requirements	380...400 V, 50 Hz (3 ph)
Electrical power	4 kW
Pre-filter rating	5 µm

¹ depends on feed water TDS, temperature, and permeate recovery — see graph on the right

² for low scaling/fouling water

**ECOSOFT MO4 RO FLOW CAPACITY GRAPH
(WITH XLE-440 MEMBRANES)**

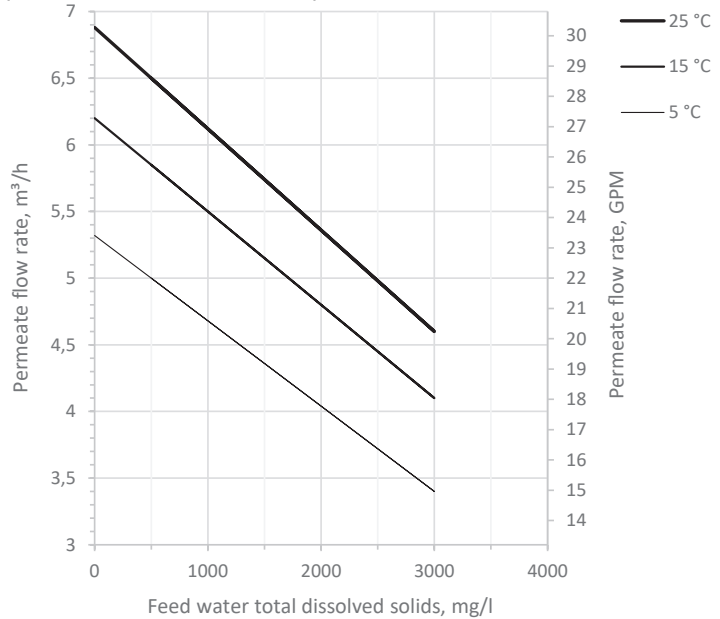

Permeate flow rates are calculated under the following conditions:
 • 2 bar influent water pressure
 • 0 bar backpressure in the permeate line
 • fresh membranes
 • XLE-440 membrane

PIPES AND INSTRUMENTS DIAGRAM

